


Cooker hob Power 7015 032

Cooker hobs

Code: 7015 032

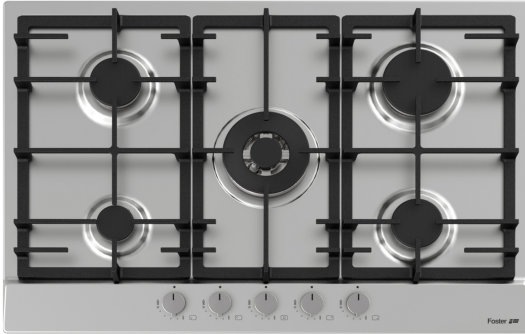

DETAILS

Finish	Foster brushed
Material	AISI 304 stainless steel
Texture	Satin
Supply	220-240 V; 50.60 Hz
Edge/Installation Type	Standard (8 mm Edge)
Dimensions	750x500 mm
Base size	76cm
Heating element	Five burners
Built-in hole	560x480 mm

Grids Cast iron grids and enamelled burner covers

Width 75 cm

Total power 10.900 W

Auxiliary 1.000 W

Semirapid 1.750 W + 1.400 W (reduced)

Rapid 2.800 W

Double crown 4.000 W

Safety Safety valve with quick-acting thermocouple

Ignition Electric ignition under knob

Gas type Tested for installation with natural gas, LPG nozzle set included.

Type Gas Hob

FEATURES

Cast iron grids Cast-iron is the ideal material for an hob grid, this due to the manifold properties characterising it: high heat capacity that improves cooking performance; high weight and stability that improve safety; sturdiness that preserves the hob's original aspect over time; easy cleaning.

Safe cooking All Foster cooker hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.

Special burners

Many Foster hobs are equipped with special burners, with two or three rings of fire that greatly increase the power delivered and the heated surface. In the DUAL models the two fire crowns also have independent ignition, making these burners perfect for both intensive and delicate cooking.


Under-knob ignition

The utmost freedom of movement with electronic under-knob ignition, a common feature of all models that allows a one-hand ignition of the burner.

Narrow cut-out

These 5 burners products for standard built-in installation require a cut-out of only 56 cm, i.e. less than their nominal width. This makes them an interesting alternative for 60 cm models, which usually require the same cut-out.

TECHNICAL DATA

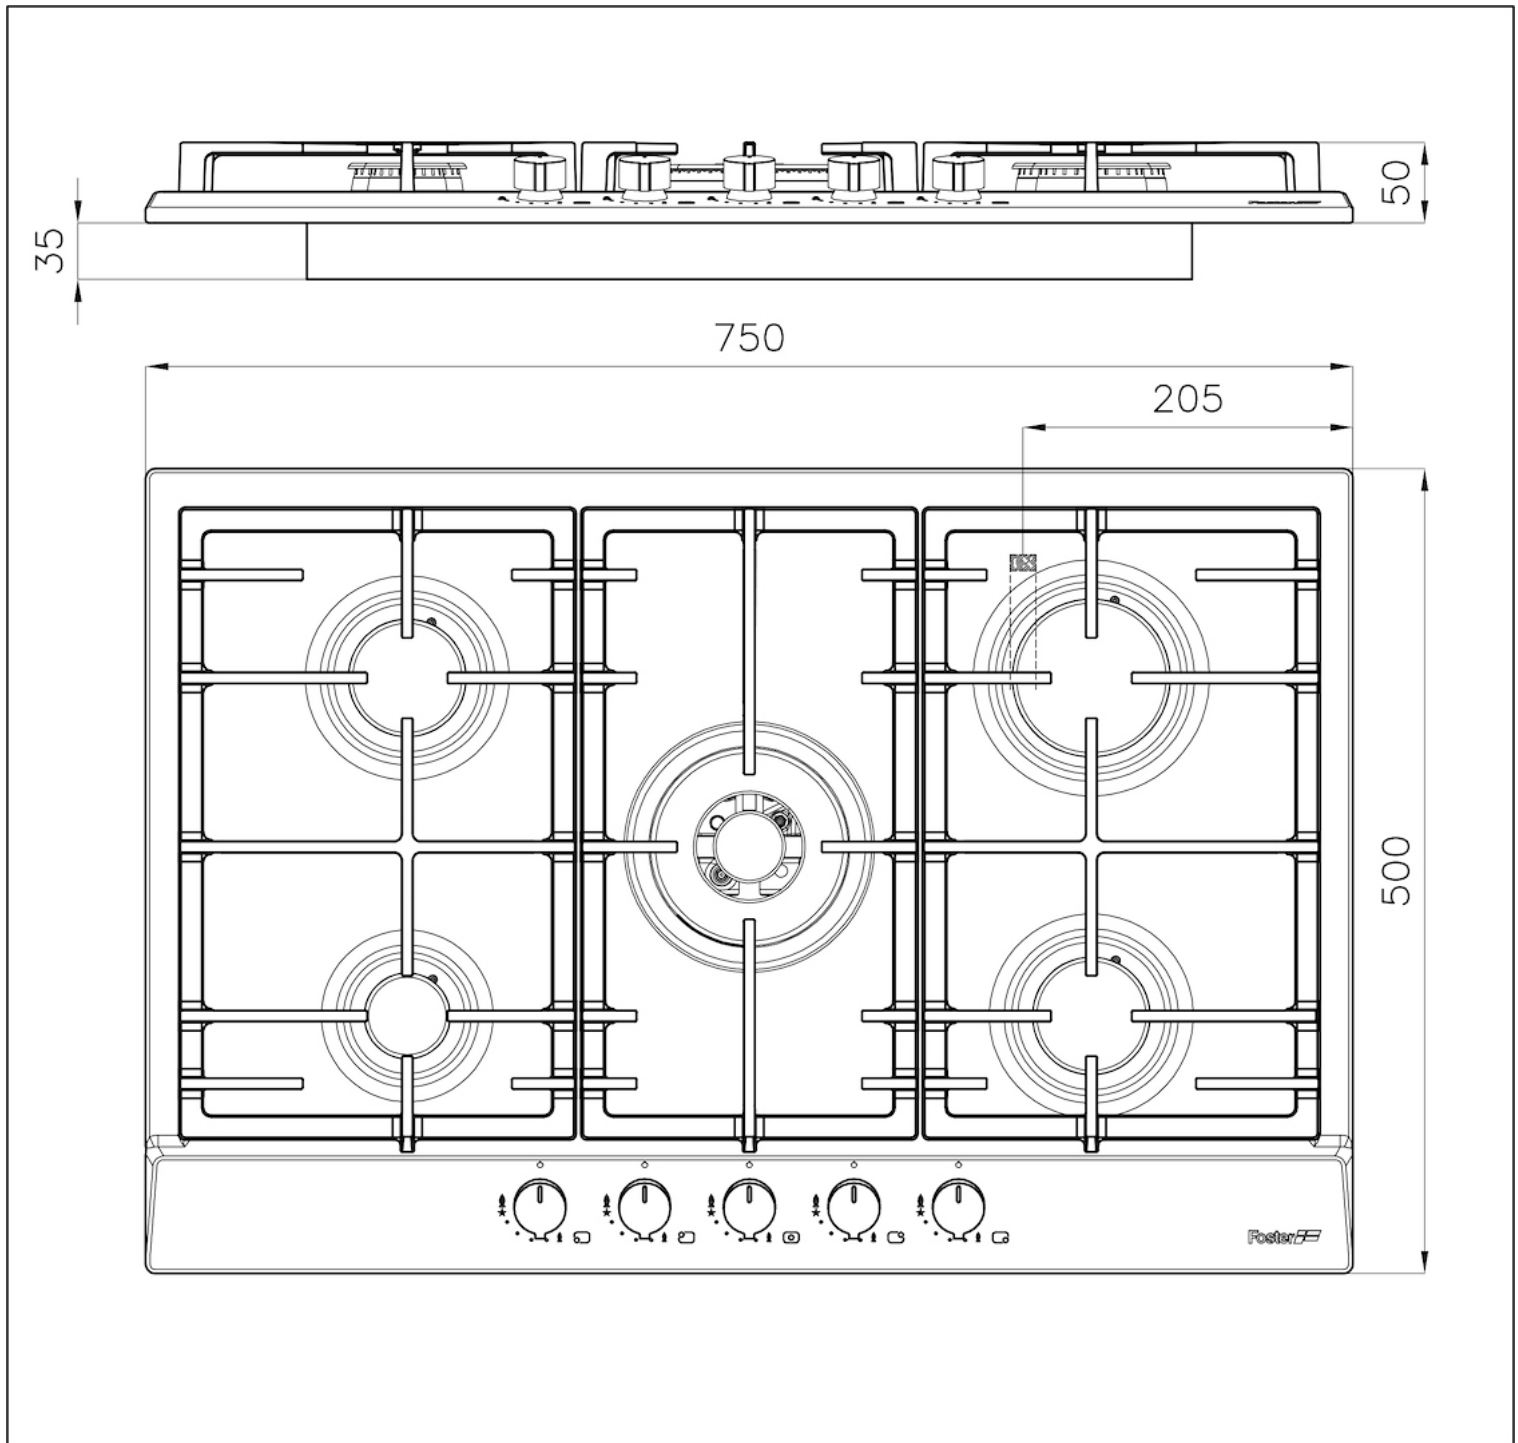

GALLERY



RECOMMENDED PAIRINGS



Hood KS 240_002



Sink Evo - 3216 05x